


# STARPRIM



## Models

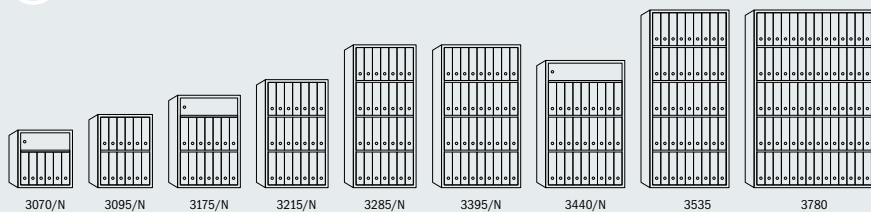

3070/N

3095/N

3175/N

3215/N

3285/N

3395/N

3440/N


3535

3780



**Certified according to EN 1143-1  
Security Grade III**

- Three-way locking mechanism with solid-steel bolts with a diameter of 40 mm, except models 3535 and 3780 – four way locking mechanism.
- A continuous formed dog bar on the hinge side protects the safe in event of attack.
- The door-frame is equipped with fire-resistant washer which protects safe interior against dust and direct irruption of flame, smoke and gases.
- All safe models are able to be secured to a floor. Also provision for snap-off detector is installed.
- Shelves are adjustable to every 50 mm, except models 3535 and 3780 – adjustable shelves to every 25 mm.
- The hinges enable 205° door opening for full access.
- Optimal File capacity. File acc. to DIN 821-D1-80 ( $w_1=75$  mm).

 **Measurements**

**STARPRIM**

MODEL	* External dimensions			Internal dimensions			Weight	Volume	Max. No. of Files
	Height [mm]	Width [mm]	Depth [mm]	Height [mm]	Width [mm]	Depth [mm]	Approx. [kg]	Approx. [liters]	
<b>3070/N</b>	600	535	464	509	455	305	275	71	6
<b>3095/N</b>	785	535	464	694	455	305	340	96	12
<b>3175/N</b>	955	610	544	864	530	385	480	176	14
<b>3215/N</b>	1135	610	544	1044	530	385	550	213	21
<b>3285/N</b>	1490	610	544	1399	530	385	660	285	28
<b>3395/N</b>	1490	760	574	1399	680	415	830	395	36
<b>3440/N</b>	1315	760	689	1224	680	530	860	441	27
<b>3535</b>	1850	840	580	1720	730	415	990	521	45
<b>**3780</b>	1850	1190	580	1720	1080	415	1305	771	70

- \* - 45 mm extra depth with handle and different locks.
- \*\* - Double doors.
- Standard locking: 1 mechanical key lock according to EN 1300 Grade B.
- Optional locks, inside equipment and additional equipment are evident from special STARPRIM Specification.

