


STARPRIM



Models

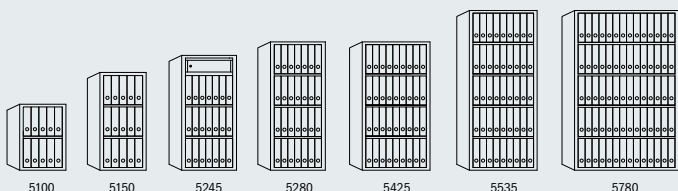

5100

5150

5245

5280

5425

5535

5780

**Certified according to EN 1143-1
Security Grade V**

- ④ Two-way locking mechanism with solid-steel bolts with a diameter of 40 mm.
- ④ A continuous formed dog bar on the hinge side protects the safe in event of attack.
- ④ All safe models are able to be secured to a floor. Also provision for snap-off detector is installed.
- ④ Shelves are adjustable to every 25 mm.
- ④ The hinges enable 205° door opening (valid only for models 5100, 5150, 5245) or 170° for other models.
- ④ File acc. to DIN 821-D1-80 ($w_1=75$ mm).

④ Measurements

MODEL	* External dimensions			Internal dimensions			Weight	Volume	Max. No. of Files
	Height [mm]	Width [mm]	Depth [mm]	Height [mm]	Width [mm]	Depth [mm]	Approx. [kg]	Approx. [liters]	
5100	840	620	566	680	440	320	705	96	10
5150	1190	620	566	1030	440	320	935	145	15
5245	1380	710	621	1220	530	375	1280	242	21
5280	1530	710	621	1370	530	375	1325	272	28
5425	1530	910	661	1370	730	415	1570	415	36
5535	1880	910	661	1720	730	415	1880	521	45
** 5780	1880	1260	661	1720	1080	415	2380	771	70

- * - 45 mm extra depth with handle and different locks.
- ** - Double doors.
- Standard locking: 1 mechanical key lock according to EN 1300 Grade B and 1 mechanical combination lock according to EN 1300 Grade B
- Optional locks, inside equipment and additional equipment are evident from special STARPRIM Specification.

